

AVOID PROBLEMS FOR PHARMACY ROBOTS

Guide for using barcodes on pharmaceutical products

Introduction

Pharmacies increasingly use robotics technology to optimise their product flow. Roughly one-third of Danish pharmacies currently use a pharmacy robot to handle pharmaceutical products, and the number is increasing. The pharmacies tend to opt for fully-automated pharmacy robotics solutions where the robot both stores and picks the products. This frees up many resources for pharmacies in their daily operations.

When the pharmacy receives a pharmaceutical product, the pharmacy robot scans the barcode on the product and subsequently measures the product dimensions in order to place the product on a correspondingly dimensioned storeroom shelf. When an item is ordered from the counter, the robot locates the pharmaceutical product and sends it to the counter.

Method

It is essential that pharmacy robots can read the barcode and measure the product dimensions. It is also important that the product packaging allows it to be sent to the pharmacy counter without damaging or opening the packaging, and without the medicine being dropped by the robot because it is difficult to handle the packaging.

Some packages cannot be handled by pharmacy robots due to problems related to barcode reading and inappropriate packaging, and consequently the package must be handled manually by a pharmacist. If such problems did not occur, each pharmacy robot would be able to handle 40% more packages. GS1 Denmark and Glostrup Apotek (a local retail pharmacy) have analysed the most common problems for pharmacy robots. Here is what to avoid when packaging pharmaceutical products which may be handled by pharmacy robots.

14. Place the barcode on

an even surface.

15. Do not place the barcode

16. Do not place the barcode

close to or around corners.

under shrink foil, welding

seams, on perforations, etc.

BARCODE CHECKLIST FOR PHARMACY ROBOTS

PRINTER

1. If a printhead is used to apply barcodes, the printhead must be cleaned and inspected on a regular basis. A dirty or damaged printhead may result in white vertical or horizontal lines in the barcode, rendering it unreadable.



A dirty or damaged printhead makes the barcode unreadable.

BARCODE TYPE, COLOUR,

BACKGROUND AND SIZE

quality and readability.

Picture B

Picture C

Picture D

barcode readability.

2. Use black lines on a white back-

ground. If this is not possible, use

dark lines on a light background.

there is sufficient contrast between

ground to ensure a good barcode

It is important to check whether

the dark lines on the white back-

Do not use red as the colour of the bars,

Do not use a transparent background. Light

The background is too dark to ensure good

lines on a dark background are not permitted.

as this will make it difficult for the red

scanner beam to read the barcode.



3. Comply with the recommended barcode and quiet zone dimensions (the quiet zone is the white margin to the right and left of the barcode). Otherwise, the scanner will not be able to read the barcode. Quiet zone dimensions depend on the size of the barcode. See quiet zone dimensions at www.gs1.dk

Picture E and F

The quiet zone is insufficient to the left and right, respectively.



4. Do not use a background which can generate reflections, as this may significantly impair the barcode scanning.

Picture G and H

The glossy packaging impairs



5. Use the correct barcode type.

Picture I

The barcode on retail packaging of pharmaceutical products should be of the EAN13 barcode type and not Code 39 as shown in the picture.



Picture J The barcode is placed in the wrong direction, and the scanner might have problems reading it.

6. If the pharmaceutical product

packaging is curved or cylindrical

with a diameter of less than 6 cm,


the barcode should be placed as a


"ladder", i.e. the lines must be hori-

zontal, as a scanner cannot read a

PACKAGING FORM

curved barcode.

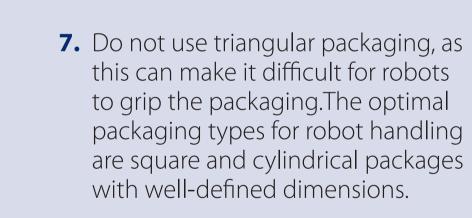

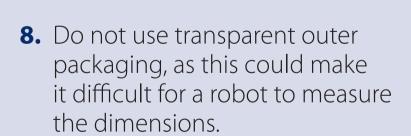

Picture K and L

The robot's measuring light will not be able to measure the dimensions due to open or transparent surfaces.




9. Use a packaging type with clear, definable dimensions that allow the robot to measure the product.

Picture M and N

It is difficult for a robot to measure the dimensions of these types of packaging as it will measure height and width at a random place.

The robot may, for instance, only measure from bottom to "shoulder". Similarly, an uneven surface, e.g. caused by an affixed patient information leaflet, will make it impossible for the robot to measure the packaging dimensions.

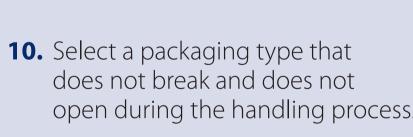

be such that the packaging volume fits the dimensions of the cardboard box, so that for instance blister packs inside the box cannot move around.

There is a great risk that jointly packaged productsbreak up during handling if not sealed with tape. Jointly packaged products should therefore be sealed with tape or completely shrink wrapped.

LABELLING MATERIAL

11. Do not use labelling material through which the underlying text is visible, e.g. in connection with packaging with foldable patient information leaflets.

Picture P

The text behind the barcode is visible through the barcode. This impairs the scannability.



13. It is recommended that only one barcode is visible on the packaging,



Picture R

Two visible barcodes. It is impossible for robot and staff to know which barcode to scan.





This guideline shows what manufacturers of pharmaceuticals should avoid when packaging pharmaceutical products which may be handled by pharmacy robots, to make sure the packages can be handled effectively by pharmacy robots. The guideline can be downloaded at: http://dox.gs1.eu/